

1.16. ڏيکاريل ٿيل ڄاڻ موجب، ڏيکاريل ٿيل ڄاڻ موجب، ڏيکاريل ٿيل ڄاڻ موجب. ڏيکاريل ٿيل ڄاڻ موجب، ڏيکاريل ٿيل ڄاڻ موجب. ڏيکاريل ٿيل ڄاڻ موجب، ڏيکاريل ٿيل ڄاڻ موجب.

1.17. ڏيکاريل ٿيل ڄاڻ موجب، ڏيکاريل ٿيل ڄاڻ موجب، ڏيکاريل ٿيل ڄاڻ موجب. ڏيکاريل ٿيل ڄاڻ موجب، ڏيکاريل ٿيل ڄاڻ موجب. ڏيکاريل ٿيل ڄاڻ موجب، ڏيکاريل ٿيل ڄاڻ موجب.

1. ڏيکاريل ٿيل ڄاڻ موجب


1. Minimum Specification for Articulating Boom Lift

Origin	Chinese, Japanese, Indian, European, American
Year	2023 or later
Condition	Brand New
Milage/ Hour	300km/ 50 hrs


Specification		Required Features
Working Height	15.1 – 16 meters	Auto-leveling platform
Horizontal Outreach	6 meters minimum	Hydraulic rotating platform 180°
Platform Size	1.5 – 2 x 0.7 x 0.9 meters	Full proportional joystick control
Stowed Length	7 meters max	Flashing beacons
Overall Width	2 – 3 meters	Horn/Hour meter
Stowed Height	2 – 3 meters	Over-tilt protection system
Transport Height	2 – 3 meters	Intelligent self-diagnosis function
Wheelbase	2 – 2.3 meters	Over-head anti-collision protection
Ground Clearance	0.2 meters minimum	Platform toolbox
Tire Type	Foam Filled	Emergency stop button
Power Source	Diesel Engine	AC power to platform
Fuel Tank Capacity	55 – 65 L	Platform auxiliary guardrail
		Platform pipe rack

Additional Spare/Toolkit to be delivered with the vehicle

1	2 Nos	Spare Wheel
2	4 Nos	Oil and air filter set
3	1 Set	Necessary Tool Kit (eg: Wrenches, screw driver if customized)
4		Service and Parts Manual in English

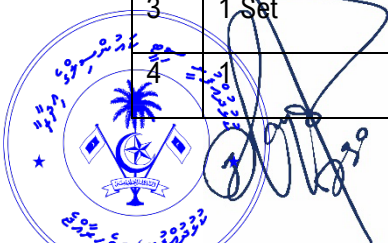

Sample

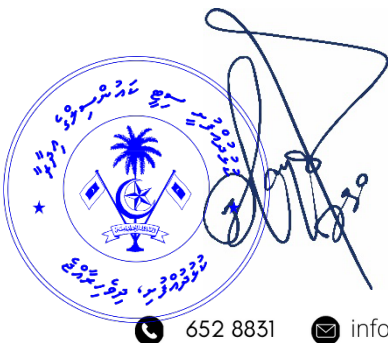

652 8831



info@kulhudhuffushicity.gov.mv



www.kulhudhuffushicity.gov.mv



@kfcitycouncil