





**Item 02: Portable Jig Saw – 18V**

Quantity: 1

Warranty: Minimum 1 Year Hardware Warranty

Specification	Description / Features
Model	Makita DJV181Z (or equivalent)
Power Source	18V LXT Lithium-Ion Battery
Motor Type	Brushless
Handle Type	Barrel Grip with slide/push-button switch
Variable Speed	800 – 3,500 SPM (Adjustable via Dial)
Stroke Length	Minimum 26 mm
Orbital Actions	3 settings + Straight cutting
Cutting Capacity	Wood: 135 mm / Steel: 10 mm
Safety/Ease of Use	Tool-less blade change, LED light, and Electric Brake
Standard Accessories	Dust nozzle, anti-splinter device, cover plate, and hex wrench

**Sample photo**



**Item 03: Cordless LITHIUM-ION 2-Tool Combo Kit ( 18 V)**

Quantity: 1

Warranty: Minimum 1 Year Hardware Warranty

Specification	Description / Features
<b>Tool 1: Impact Driver</b>	
Model	Milwaukee M18 FID3-0X (or equivalent)
Voltage	18V Lithium-Ion
Motor Type	Brushless
Torque	Minimum 210 Nm
Speed	Minimum 3,600 RPM
<b>Tool 2: Percussion Drill</b>	
Model	Milwaukee M18 FPD3-0X (or equivalent)
Voltage	18V Lithium-Ion
Motor Type	Brushless
Max Torque	Minimum 145 Nm
No Load Speed	0-480 / 0-1,950 RPM (2-speed)
Chuck Type	13mm (1/2") All-Metal Keyless Chuck
Max BPM	Minimum 30,000 BPM
Length	Maximum 180 mm
Should also include	Batteries: 2 x 5.0Ah 18V Li-Ion Batteries Charger: 1 x 18V Compatible Charger

**Sample photo**




**Item 04: Cordless LITHIUM-ION 2-Tool Combo Kit (12V)**

Quantity: 1

Warranty: Minimum 1 Year Hardware Warranty

Specification	Description / Features
<b>Tool 1: Impact Driver</b>	
Model	Milwaukee M12 FID2-0 (or equivalent)
Voltage	12V — M12 REDLITHIUM-ION
Motor Type	Brushless
Max Torque	Minimum 170 Nm
No Load Speed	Minimum 3,600 RPM (multi-mode)
Impact Rate	Minimum 4,000 IPM
Chuck Type	1/4" Hex Keyless Chuck
Drive Modes	Minimum 4-mode Drive Control
Lighting	Minimum Twin LED Job Light
Intelligence	REDLINK PLUS™ Overload Protection
<b>Tool 2: Percussion Drill</b>	
Model	Milwaukee M12 FPD2 Gen III (or equivalent)
Voltage	12V — M12 REDLITHIUM-ION
Motor Type	Brushless
Max Torque	Minimum 45 Nm
No Load Speed	0–450 / 0–1,550 RPM (2-speed)
Percussion Rate	Minimum 22,500 BPM
Chuck Type	13mm (½") All-Metal Keyless Chuck
Length	Maximum 152 mm
Intelligence	REDLINK PLUS™ Overload Protection
Should also include	Batteries: 2 × 5.0Ah 12V M12 REDLITHIUM-ION Batteries
	Charger: 1 × 12V M12 Compatible Charger

**Sample photo**



**Item 05: 18V LXT® Brushless Blower / Vacuum Mulcher Kit**

Quantity: 2

Warranty: Minimum 1 Year Hardware Warranty

Specification	Requirement
Model	Makita DUB187Z (or equivalent)
Minimum Brands	Makita / Milwaukee / DeWalt (or equivalent)
Tool Type	Cordless Blower with Vacuum & Mulching Function
Voltage	18V DC
Battery Type	Lithium-Ion (Li-ion)
Batteries Included	Minimum 2 x 18V battery
Battery Capacity	≥ 5.0 Ah
Motor Type	Brushless
Blower Air Speed	≥ 230 km/h
Blower Air Volume	≥ 4.2 m³/min
Vacuum Air Volume	≥ 6.1 m³/min
No Load Speed	9,000 – 13,500 rpm
Vacuum Function	Yes
Mulching Function	Yes
Mulching Ratio	≥ 10:1
Speed Control	Variable speed trigger
Collection Bag	Minimum 25L capacity, included
Design	Lightweight, ergonomic for prolonged use
Application	Clearing leaves, dust, dry debris, lawn waste
Should also include	1 x Battery charger 1 x ≥ 5.0 Ah Batteries

**Sample Photo**




**Item 06: Cordless Angle Grind – 18V**

Quantity: 1

Warranty: Minimum 1 Year Hardware Warranty

Specification	Description / Features
Model	Milwaukee M18 FSAGV100XB-0X0 (or equivalent)
Tool Type	Cordless Angle Grinder
Disc Size	100mm (4")
Power Source	Cordless
Voltage	18V DC
Battery Platform	18V — M18 REDLITHIUM-ION
Motor Type	POWERSTATE™ Brushless
Speed Control	Variable speed — 5 settings
No-Load Speed	3,500 – 8,500 RPM
Brake System	RAPIDSTOP™ — stops disc within 2 seconds
Spindle Lock	Yes
Safety Guard	Tool-free adjustable protective guard
Handle	Ergonomic side handle
Body Material	Heavy-duty industrial-grade housing
Applications	Grinding metal and masonry, Cutting steel and similar materials, Surface polishing
Should also include	Batteries: 1 × 5.0Ah 18V M18 REDLITHIUM-ION Batteries Charger: 1 × 18V M18 Compatible Charger

**Sample Photo**



7 39 : 39


### Item 07: Cordless Chain Saw – 18V (Top Handle Type)

Quantity: 1

Warranty: Minimum 1 Year Hardware Warranty

Specification	Description / Features
Model	Makita GCU01Z (or equivalent)
Tool Type	Cordless Top Handle Chain Saw
Voltage	40V max
Battery Platform	40V max XGT® Lithium-Ion
Motor Type	Brushless
Guide Bar Length	12" (300 mm)
Chain Pitch	3/8" LP
Chain Gauge	.043"
Chain Speed	Minimum 4,882 FPM ( $\approx$ 24.8 m/s)
Speed Control	Variable speed trigger
Handle Type	Top handle
Electric Brake	Yes
Lock-Off Lever	Yes — prevents accidental engagement
Chain Lubrication	Automatic adjustable chain oiling system
Protection	Overload, over-discharge and overheating protection
Application	Pruning, trimming, small-medium tree cutting, arborist in-tree work
Should also include	Battery: 2 × 40V max XGT® Li-Ion Battery $\geq$ 5.0Ah
	Charger: 1 × 40V max XGT® Compatible Charger

#### Sample photo



8 39 : 39

**Item 08: Cordless Hedge Trimmer – 18V (Heavy-Duty Type)**


Quantity: 01

Usage: Garden / Landscaping / Municipal Maintenance

Warranty: Minimum 1 Year Hardware Warranty

Specification	Description / Features
Model Reference	Milwaukee 3034-21 M18 FUEL 30" Hedge Trimmer (or equivalent)
Tool Type	Cordless Hedge Trimmer
Power Source	Cordless
Voltage	18V DC
Battery Platform	18V — M18 REDLITHIUM-ION
Motor Type	POWERSTATE™ Brushless
Blade Type	Dual-sided, dual-action hardened steel blade
Blade Length	≥ 30" (≈ 760 mm)
Cutting Capacity	≥ 32 mm (≈ 1-1/4" branch diameter)
Blade Speed	≥ 3,100 SPM
Handle Type	5-position rotating rear handle
Safety Features	Two-hand trigger, blade tip guard, safety lock
Intelligence	REDLINK PLUS™ Overload / Overheat Protection
Body Material	Heavy-duty housing
Applications	Hedge trimming, shaping, landscaping maintenance
Should also include	Batteries: 1 × M18 REDLITHIUM FORGE 8.0Ah Battery
	Charger: 1 × M18/M12 Rapid Charger
	Accessories: Clippings sweep attachment, blade sheath

**Sample Photo**




## Item 09: Cordless Telescopic Pole Saw & Pruning Shears Kit

Quantity: 01

Usage: Garden / Landscaping / Tree Trimming


Warranty: Minimum 1 Year Hardware Warranty

Specification	Description / Features
<b>Pole Saw</b>	
Model Reference	Makita DUA301Z (or equivalent)
Power Source	Cordless
Tool Type	Cordless Telescopic Pole Saw
Voltage	36V (18V × 2) LXT
Battery Platform	18V LXT Lithium-Ion
Motor Type	Brushless
Pole Reach	Telescopic, adjustable 2.5m – 3.8m (overall reach ≥ 4.0m)
Chainsaw Attachment	Mini chainsaw attachment included
Guide Bar Length	300mm (12")
Chain Speed	≥ 20 m/s
Chain Pitch	3/8"
Oil Tank	yes
Electric Brake	Yes — AFT kickback protection
Chain Lubrication	Automatic adjustable oiling system
Safety Features	AFT kickback protection, electric brake, XPT dust & water resistance
Handle	Ergonomic rear grip, battery guard doubles as auxiliary grip
<b>Pruning Shears</b>	
Model Reference	Makita DUP181Z (or equivalent)
Voltage	18V LXT
Attachment System	Quick-connect / tool-less attachment system
Motor Type	Brushless
Cutting Capacity	≥ 30 mm branch diameter
Blade Opening	4 adjustable opening angles
Safety Features	Electric brake, XPT dust & water resistance
Should also include	Batteries: 3 × 6.0Ah 18V LXT Li-Ion Batteries (2 for pole saw + 1 for pruning shears)
	Charger: 1 × 18V LXT Compatible Rapid Charger
	Accessories: Guide bar, chain cover, saw chain, wrenches, shoulder strap



سورة: 39 في 10

**Sample Photo**



## Item 10: Cordless Compact Blower – 18V

Quantity: 01

Usage: General / Maintenance / Workshop

Warranty: Minimum 1 Year Hardware Warranty

Specification	Description / Features
Brand	Milwaukee M18 BBL-0 (or equivalent)
Tool Type	Cordless Compact Blower
Power Source	Cordless
Voltage	18V DC
Battery Platform	18V — M18 REDLITHIUM-ION
Motor Type	High-performance motor
Air Speed	≥ 160 km/h
Air Volume	≥ 2.5 m <sup>3</sup> /min
Speed Control	Variable speed trigger — 3 speed settings
Nozzle Type	Removable nozzle included
Design	Compact and lightweight design
Handle Type	Ergonomic handle with non-slip grip
Body Material	Shock-absorbing polymer housing
Applications	Dust removal from equipment, cleaning workshops and tools, blowing debris from work areas
Noise Level	Suitable for indoor and outdoor maintenance use
Extra Features	Lock-on switch for continuous use, Low vibration operation
Should also include	Batteries: 1 × 4.0Ah 18V M18 REDLITHIUM-ION Batteries
	Charger: 1 × 18V M18 Compatible Charger
	Accessories: Nozzle extension (228.6mm), universal inflator/deflator attachment

### Sample Photo



سورة: 39 في 12

## Item 11: Rototiller / Soil Cultivator

Quantity: 01


Usage: Garden

Warranty: Minimum 1 Year Hardware Warranty

Specification	Requirement
Brand	Honda F560 (or equivalent)
Tool Type	Petrol Compact Power Tiller / Cultivator
Power Source	Petrol / Gasoline
Engine Type	4-Stroke OHV
Engine Model	GX160 — 163 cc
Engine Net Power	≥ 3.6 kW @ 3,600 rpm
Engine Net Torque	≥ 10.3 Nm @ 2,500 rpm
Fuel Tank Capacity	≥ 2.20 litres
Engine Oil Capacity	≥ 0.60 litres
Starting System	Recoil start
Transmission	Constant mesh, chain final drive
Gearbox	≥ 6 forward + 2 reverse gears
Forward Tool Rotation Speed	16–122 rpm (variable)
Reverse Tool Rotation Speed	16–32 rpm
Max Tilling Width	≥ 900 mm
Max Tilling Depth	≥ 330 mm
Side Clutch	Yes — for precise positioning control
PTO (Power Take Off)	Yes — for hulling, spraying, rear-rotary or box tine attachments
Handle Type	Height adjustable handle
Vibration	≤ 13.2 m/s <sup>2</sup>
Attachments Compatible	Lawn de-thatcher, aerator/scarifier, ridger, plough, potato lifter
Should also include	Tines: Multiple rotor/tine options supplied
	Documentation: Operator manual, parts list
	Support: Authorized dealer network with local service access



**Sample Photo**

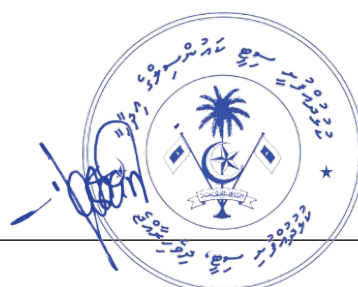

تاریخ: 13 39

## Item 12: Cordless Earth Auger – 36V (Twin 18V Batteries)

Quantity: 01

Usage: Garden / Landscaping / Fence Post Holes / General Earth Drilling

Warranty: Minimum 1 Year Hardware Warranty

Specification	Description / Features
Brand	Makita DDG460ZX7 (or equivalent)
Tool Type	Cordless Earth Auger
Power Source	Cordless
Voltage	18V × 2 (36V total output)
Battery Platform	18V — LXT LITHIUM-ION
Motor Type	Brushless motor
Speed Settings	Variable 2-speed control
Maximum Torque	≥ 130 Nm
Auger Capacity – Sandy Soil	≥ 200 mm
Auger Capacity – Clay Soil	≥ 150 mm
Reversing Function	Yes (for bit removal)
Safety Features	Built-in clutch, overload protection
Handle Type	Dual side assist handles (reaction bar + auxiliary handle)
Body Material	Heavy-duty industrial-grade housing
Protection	Dust and water-resistant construction
Applications	Digging fence post holes, Tree planting, Landscaping preparation
Noise Level	Suitable for outdoor use
Should also include	Batteries: 2 × 5.0Ah 18V LXT Lithium-Ion Batteries
	Charger: 1 × 18V LXT Compatible Fast Charger
	Accessories: Dual handle set (bar + auxiliary)

### Sample Photo



39 : 14



652 8831



info@kulhudhuffushicity.gov.mv



www.kulhudhuffushicity.gov.mv



@kfcitycouncil

**Item 13: Earth Auger Drill Bit**


Quantity: 2

Specification	Description / Features
Bit compatible to	Makita DDG460 Cordless Earth Auger
Material	Alloy Steel
Cutting Diameter	≥ 7.92 Inches / ≥ 200 mm
Finish Type	Steel=
Shank Type	Straight
Tool Flute Type	Spiral
Minimum Bore Diameter	8 Inches / 200 mm
Surface Recommendation	Alloy Steel

**Item 14: Earth Auger Bit Adapter D**

Quantity: 2

Specification	Description / Features
	Earth auger bit adapter
	Suitable for use with Makita cordless DDG460 Earth Auger
	Manufactured from steel for increased durability and a longer service life
	Adapter installs quickly and easily
	Compatible with industrial earth auger drill bits



سورة: 39 في 15

### Item 15: Sod Cutter – Petrol / Gasoline Powered

Quantity: 01

Usage: Garden / Landscaping / Lawn Replacement / Ground Preparation

Warranty: Minimum 1 Year Hardware Warranty

Specification	Description / Features
Brand	Husqvarna — Honda GX160 4.8 HP engine (or equivalent)
Machine Type	Sod cutter, smoothest and most stable on the market
Power Source	Petrol / Gasoline engine
Engine Type	4-Stroke / 2-Stroke petrol engine
Engine Capacity	≥ 160 cc (approx.)
Rated Power	≥ 4.0 kW (approx.)
Cutting Width	≥ 450 mm
Cutting Depth	Adjustable up to ≥ 50 mm
Drive Type	4-Wheel Drive
Transmission	Peerless transmission — 4 forward, 1 reverse gears
Wheels	≥10" Semi-Pneumatic V-Tractor Tread wheels
Blade System	Hardened steel sod cutting blade
Fuel Tank Capacity	Sufficient for extended operation
Starting System	Recoil / Pull start
Handle Type	Anti-vibration handle
Safety Features	Blade guard, engine safety cut-off
Body Material	Industrial-grade housing
Applications	Lawn replacement, Landscaping prep, Sod cutting and trenching

#### Sample Photo



شماره: 39 من 16

## Item 16: Petrol Mini Stump Grinder

Quantity: 01

Usage: Garden / Landscaping / Forestry / Tree Stump Removal

Warranty: Minimum 1 Year Hardware Warranty

Specification	Description / Features
Brand	K-Maxpower DR-SG-15 (or equivalent)
Tool Type	Petrol Mini Stump Grinder
Power Source	Petrol / Gasoline engine
Engine Type	4-Stroke OHV, Single Cylinder, Air-Cooled
Engine Power	≥ 15 HP
Engine Capacity	≥ 420 cc
Starting System	Recoil / Pull start
Cutting Wheel Diameter	≥ 300 mm
Cutting Wheel Thickness	≥ 90 mm
Teeth Quantity	≥ 9 carbide-tipped teeth
Carbide Teeth	Hardened alloy carbide cutting teeth — resharpenable
Cutter Depth Below Ground	≥ 235 mm
Cutter Height Above Ground	≥ 600 mm
Drive System	Large pneumatic tyres for mobility on rough terrain
Wheels	Thick/tread wheels for mobility
Handle Type	Adjustable ergonomic handle — foldable for storage
Brake System	Drum brake on drive wheel
Body Material	Heavy-duty industrial-grade steel frame
Applications	Tree stump grinding, Root removal, Landscaping and garden clearing
Noise Level	Suitable for outdoor field use
Should also include	Documentation: Operator manual, parts list

### Sample Photo



سورة: 39 في 17

**Item 17: Petrol Self-Propelled Lawn Mower**

Quantity: 01


Usage: Garden / Landscaping / Grounds Maintenance

Warranty: Minimum 1 Year Hardware Warranty

Specification	Description / Features
Brand and Model	Hyundai HDLM46QV / HYM18150SP (or equivalent petrol mower)
Machine Type	Petol Self-Propelled Lawn Mower
Power Source	Petrol / Gasoline engine
Engine Type	4-Stroke OHV petrol engine
Engine Capacity	≥ 150 cc
Engine Power	≥ 3.2 HP
Drive Type	Self-propelled, rear wheel drive (variable speed)
Cutting Width	18" (≥ 460 mm)
Cutting Height	Adjustable, multiple positions
Deck Type	Steel construction, corrosion-resistant housing
4-in-1 Functionality	Mulch / Rear discharge / Side discharge / Collection
Grass Collection	Rear catcher bag included
Wheels	Large rear wheels and durable front wheels
Handle Type	Ergonomic, foldable handle with soft grip
Safety Features	Operator presence control / safety lever
Starting System	Recoil / Easy start
Transmission	Gears / self-propel drive with variable speed
Body Material	Heavy-duty steel deck with corrosion protection
Cutting Blades	Heavy-duty high-quality steel mower blade
Spare Blade Included	1 × Additional high-quality spare cutting blade included
Noise Level	Suitable for outdoor facility use
Applications	Lawn mowing, Landscape maintenance, Garden trimming
Extra Features	Wash hose connector for easy cleaning
Should also include	Documentation: Operator manual, parts list
	Spare Blade: 1 × Additional high-quality spare cutting blade included



**Sample Photo**



سہولت: 39 ع 18

**Item 18: Industrial Dryer – 15 kg**

Quantity: 01

Usage: General / Facility / Laundry

Warranty: Minimum 1 Year Hardware Warranty

Specification	Minimum Requirement
Brand and Model	OASIS HG300D (or equivalent industrial laundry equipment brand)
Type	Commercial / Industrial Tumble Dryer
Drying Capacity	≥ 15 kg (dry load)
Drum Material	Stainless Steel (AISI 304 or equivalent)
Outer Body	Heavy-duty, rust-resistant steel panels
Door	Large loading door with wide opening (≥ 180°)
Motor Type	Inverter (variable frequency) drive motor with belt drive — soft start/stop
Fan Motor	Inverter fan motor — axial airflow design
Heating Type	Electric heating system (Steam heating, gas heating or any other heating type will be REJECTED)
Control Type	Automatic control with adjustable drying time and temperature
Airflow System	High-efficiency axial airflow system
Drum Rotation	Standard reversing cylinder (alternating rotation)
Noise Level	Low vibration, suitable for indoor commercial use
Power Supply	380V / 50Hz (3-phase industrial supply)
Safety Features	Thermal overload protection, door safety interlock, emergency stop
Installation	Floor standing
Application	Hotels, hospitals, commercial laundries, facility laundry rooms
Should also include	Documentation: Operator manual, parts list

**Sample Photo**



**Item 19: High-Pressure Cleaner**

Quantity: 01

Warranty: Minimum 1 Year Hardware Warranty

Specification	Description / Features
Brand and Model	Kärcher HD 5/12 C (or equivalent cold-water high-pressure cleaner)
Machine Type	Cold-Water High-Pressure Cleaner
Power Source	Mains / Electric
Supply Voltage / Frequency	230 V / 50 Hz, Single Phase
Connected Load	Approx. 2.5 kW
Working Pressure	Approx. 120 bar
Maximum Pressure	Approx. 175 bar
Water Flow Rate	Approx. 500 L/h
Inlet Temperature Rating	≤ 60 °C
High-Pressure Hose	Approx. 10 m
Spray Gun	High-pressure spray gun included
Spray Lance	Standard extension lance
Nozzle	Variable / interchangeable
Cleaning Agent Function	Detergent suction / application
Safety / Control	Automatic pressure shut-off
Construction	Axial pump, brass cylinder head, impact-resistant plastic bo
Applications	Removal of dirt, grime, surfaces cleaning
Body Material/ Handling	Ergonomic handle, lightweight, portable, integrated storage
Should also include	Accessories: Spray gun, lance, triple nozzle, rotary nozzle, high-pressure hose

**Sample Photo**




**Item 20: Heavy-Duty Impact Phillips Screwdriver Bit**

Quantity: 02 set

Usage: Electrical / Mechanical / General Installation Works

Specification	Description / Features
Brand and Model	Milwaukee 48-32-4564 (or equivalent)
Bit Type	Impact Power Bit — Phillips PH2
Bit Length	≥ 3.5 inches (89 mm)
Shank Type	1/4" Hex
Material	Alloy steel, heat treated
Finish	Black phosphate or equivalent
Key Features	Shock absorption zone, wear-resistant tip, anti-strip geometry
Tip Type	Precision-machined Phillips tip
Compatibility	Impact drivers and drill drivers
Pack Size	5 pieces

**Sample Photo**





**Item 21: Insulated Screwdriver Set – 1000V with Case**

Quantity: 2 Set

Usage: Electrical / Mechanical / General Installation Works

Specification	Description / Features
Brand	HOUSERAN (or equivalent)
Type	Insulated Screwdriver Set — Phillips & Slotted
Voltage Rating	≥ 1000V (high-dielectric insulation)
Piece Count	8 pieces
Included Sizes	SL3×75, SL4×100, SL5×100, SL6×125, PH0, PH1, PH2
Shaft Material	Hardened steel shafts
Tip	Magnetic tips
Handle	Ergonomic anti-slip insulated handle
Applications	Electrical work, panel wiring, terminal connections, maintenance
Should also include	Carrying case

**Sample Photo**

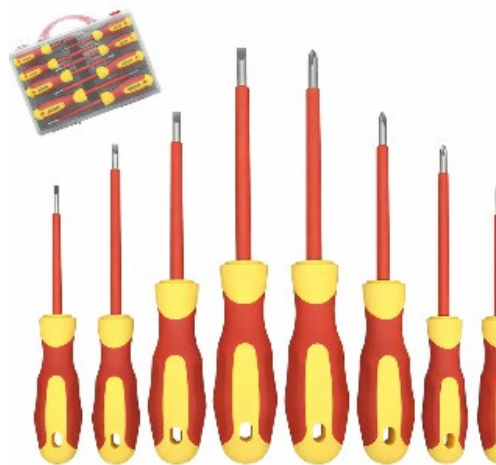

**Item 22: Multifunctional Wire Stripper with Voltage Tester**

Quantity: 2

Warranty: Minimum 1 Year Hardware Warranty

Specification	Description / Features
Brand	FAITIO (or equivalent)
Tool Type	Multifunctional Wire Stripper with Built-in Voltage Tester
Functions	≥ 8-in-1 — wire stripping, cutting, crimping, splitting, winding, cable opening, wire pulling, voltage testing
Voltage Tester Range	12V – 250V AC / DC
Voltage Detection	Visual LED + audible alarm
Tester Type	Integrated electrical voltage tester
Wire Stripping Range	1.0 – 4.0 mm <sup>2</sup> (AWG 10–18, solid & stranded)
Cutting Capacity	≥ 25 mm <sup>2</sup> cable
Blade Material	Hardened high-carbon steel (SK5 or equivalent)
Body Material	Stainless steel — heat treated, corrosion resistant
Handle Type	Dual TPR ergonomic non-slip insulated handle
Insulation	Electrically insulated handle for safety
Spring Mechanism	Automatic opening spring
Safety Features	Shock-resistant insulated handle

**Sample Photo**



### Item 23: Bucket Grease Pump – 10 Kg Capacity

Quantity: 1

Warranty: Minimum 1 Year Hardware Warranty

Specification	Description / Features
Brand and Model	GROZ VGP/10A (or equivalent)
Tool Type	Hand Operated Bucket Grease Pump
Grease Bucket Capacity	Minimum 10 kg
Operating Type	Manual lever operated
Maximum Pressure	≥ 275 Bar (4,000 PSI)
Grease Delivery	Up to 9 g per stroke (high volume setting)
Pressure Settings	High pressure, medium pressure, and high volume selectable settings
Hose	High-pressure rubber hose, minimum 2 m length
Hose Size	Approx. 1/4" internal diameter
Compatibility	Suitable for NLGI 1, 2, and 3 greases
Construction	Heavy-duty steel construction
Follower Plate	Rubber lined follower plate included
Handle Type	Heavy-duty lever handle
Applications	Lubrication of machinery, Earth-moving equipment, Agricultural equipment Automotive maintenance, Industrial maintenance
Durability	Industrial-grade construction
Compliance	Suitable for professional industrial use

#### Sample Photo



## Item 24: Masonry Drill Bit Set – Tungsten Carbide Tip (10-Piece)

Quantity: 3 Set

Specification	Description / Features
Brand	WildBossy (or equivalent)
Tool Type	Serrated Masonry Drill Bit Set
Set Contents	Minimum 10-Piece Drill Bit Set
Drill Bit Sizes	Range from 3/16" to 1/2"
Tip Material	Tungsten Carbide Tip
Body Material	Hardened high-carbon steel
Tip Design	Serrated cutting edge for improved drilling performance
Shank Type	Standard round shank / Hex shank
Compatibility	Electric, hand & bench drills
Heat Resistance	High heat resistance for heavy-duty use
Durability	Wear-resistant and long service life
Storage	Storage case included
Applications	Concrete drilling, Brick drilling, Tile drilling, Masonry drilling, Wood drilling, Plastic drilling, Light metal drilling

### Sample Photo



سورة: 39 في 25



652 8831



info@kulhudhuffushicity.gov.mv



www.kulhudhuffushicity.gov.mv




@kfcitycouncil

**Item 25: Concrete Screw Assortment Kit with Drill Bit – Flat Head Type**

Quantity: 10 Set

Specification	Description / Features
Brand	SATANTECH / RURITKIT / Kevinrooty (or equivalent)
Tool Type	Concrete Screw Assortment Kit
Set Quantity	≥ 200 pieces total
Screw Sizes	Mixed assortment — minimum 4 sizes including: 3/16" x 1-1/4", 3/16" x 1-3/4", 1/4" x 1-1/4", 1/4" x 1-3/4"
Head Type	Flat Head Only
Drive Type	Hex / Torx / Phillips drive (manufacturer standard)
Drill Bit Included	Compatible masonry drill bit included
Point Type	Diamond point — self-drilling tip
Thread Type	High-low masonry thread — high strength
Material	Hardened carbon steel — heat treated
Surface Finish	Corrosion-resistant coating (blue epoxy / Climaseal or equivalent)
Compatibility	Concrete, brick, cement block, masonry
Storage	Heavy-duty plastic storage case with size labels included

**Sample Photo**

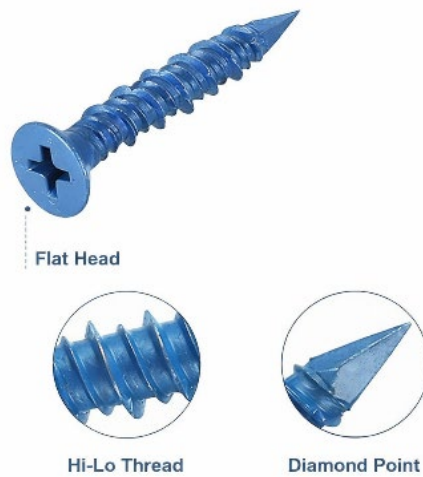

**Item 26: Heavy-Duty Tool Bag with Multiple Pockets**

Quantity: 2

Specification	Description / Features
Brand	Amazon Basics (or equivalent)
Tool Type	Tool storage bag
Bag Type	Soft-sided portable tool storage bag
Material	Heavy-duty polyester fabric
Fabric Weight	Minimum 600D polyester (or equivalent industrial grade)
Base Type	Reinforced and abrasion-resistant bottom
Opening Type	Wide mouth opening
Closure Type	zipper closure
Handle Type	Dual carry handles with padded grip
Shoulder Strap	Adjustable and removable shoulder strap included
Storage Pockets	Multiple internal and external pockets (minimum 10 pockets)
Pocket Type	Combination of open and closed pockets
Load Capacity	Suitable for carrying heavy tools
Stitching	Reinforced industrial stitching
Colour	Black / Standard industrial colour
Portability	Lightweight and easy to carry
Durability	Industrial-grade heavy-duty construction
Compliance	Suitable for professional and industrial use

**Sample Photo**



**Item 27: Brad Nails – 18 Gauge Stainless Steel (1000 Pieces Pack)**

**Quantity:** 1000 Nails Per Size

Specification	Description / Features
Brand	DEWBIN (or equivalent)
Product Type	Brad Nails — 18 Gauge
Nail Material	Stainless Steel
Surface Finish	Corrosion-resistant finish
Nail Head Type	Brad head (small finishing head)
Nail Shank Type	Straight smooth shank
Point Type	Diamond point
Strip Type	Collated nail strip
Compatibility	Compatible with standard 18-gauge brad nailers
Rust Resistance	Suitable for indoor and outdoor applications
<b>Required Sizes &amp; Quantities</b>	
Size 1	18 Gauge x 1" (25mm) — 1,000 nails
Size 2	18 Gauge x 2" (50mm) — 1,000 nails
Total Quantity	2,000 nails in total — both sizes must be supplied

**Sample Photo**




**Item 28: Stainless Steel Corner Brace – L Bracket (20 Pieces Pack)**

**Quantity:** 10 Pack (20 pieces per pack)

Specification	Description / Features
Brand	Aufuga (or equivalent)
Product Type	Corner Brace / L Bracket
Material	Stainless Steel
Finish	Black coated / Corrosion-resistant finish
Bracket Type	90° Angle Corner Bracket
Size	1" x 1" x 0.6" (approx. 25 mm x 25 mm x 15 mm)
Thickness	Minimum 1.5 mm (or manufacturer standard)
Mounting Holes	Pre-drilled mounting holes
Hole Quantity	Minimum 2 holes
Pack Quantity	20 Pieces per Pack
Edge Finish	Smooth rounded edges
Corrosion Resistance	Suitable for indoor and outdoor use
Durability	Heavy-duty industrial-grade construction
Applications	Furniture, shelves, wood joints
Installation	Screw fixing installation
Compliance	Suitable for professional and industrial use

**Sample Photo**

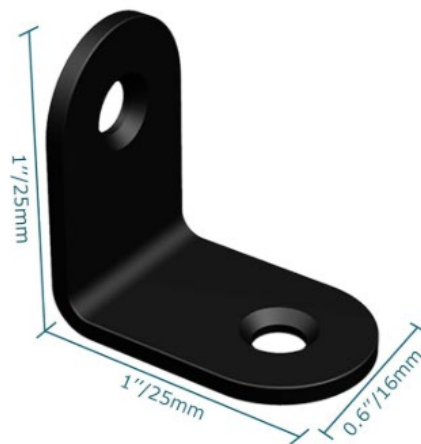

**Item 29: Cordless Track Saw 18v**

**Quantity:** 1

**Warranty:** Minimum 1 Year Hardware Warranty

Specification	Description / Features
Brand and Model	Milwaukee 2831-20 M18 FUEL™ 6-1/2" Plunge Track Saw (or equivalent)
Power System	M18 — 18V Li-Ion cordless
Motor	POWERSTATE™ brushless — 5,600 RPM
Blade Size	6-1/2" (165mm)
Bevel Capacity	0°, 22.5°, 45°
Dust Collection	Vac port + dust bag
Plunge Action	Smooth pivoting plunge motion
Speed Control	Variable speed dial
Safety	Riving knife — kickback protection
<b>Track Saw Guide Rail</b>	
Model Reference	Milwaukee 48-08-0571 — 55" Guide Rail
Length	55 inches per rail
Quantity	2 pieces
Combined Length	110" (≈ 9.2ft / 2,794mm) when joined — covers full 8ft sheet
Material	Extruded aluminium — precision straight cuts
Saw Compatibility	Compatible with Milwaukee M18 FUEL™ 6-1/2" Plunge Track Saw (2831-20)
Clamp Compatible	Compatible with Milwaukee Rail Clamps (48-08-0573)
Connector Compatible	Compatible with Milwaukee Rail Connector (48-08-0574 or 48-08-0575)
Should also include	Anti-Splinter Strip
	Non-Slip Pads
	Anti-Friction Strips



### Item 30: Submersible Dewatering Pump

Quantity: 1

Warranty: Minimum 1 Year Hardware Warranty

Specification	Description / Features
Brand and Model	Tsurumi LB-480 (or equivalent)
Type	Manual submersible dewatering pump — no float switch
Motor Output	≥ 0.5 HP (≥ 0.37 kW)
Voltage	220–240V / 50Hz / Single Phase
Max Flow Rate	≥ 200 L/min (≥ 53 GPM)
Max Head	≥ 10 m (≥ 33 ft)
Discharge Size	2" (50mm) NPT
Solids Handling	≥ 6mm diameter
Impeller	Semi-vortex type — urethane or equivalent abrasion-resistant material
Pump Casing	Rubber, aluminium alloy, or cast iron — corrosion resistant
Shaft	Stainless steel
Fasteners	Stainless steel
Mechanical Seal	Dual Silicon Carbide (SiC) faces — oil-filled chamber
Thermal Protection	Built-in — overload and dry-run protection
Power Cable	≥ 10m — submersible grade
Weight	≤ 14 kg
Min. Operating Water Level	≤ 90mm (3.5")
Operation Mode	Manual only — plug in to run, unplug to stop
Duty	Continuous operation rated

#### Sample Photo



### Item 31: Milwaukee M18™ 6.0Ah Battery

Quantity: 3

Specification	Description / Features
Brand and Model	Milwaukee 48-11-1860 M18™ REDLITHIUM™ XC6.0 (or equivalent)
Voltage	18V
Capacity	≥ 6.0 Ah
Battery Type	Lithium-Ion (Li-Ion)
Protection	Overload, discharge and temperature protection
Cold Weather	Operates below 0°F / -18°C
Fuel Gauge	Onboard charge indicator
Compatibility	Compatible with all M18™ platform tools and chargers

### Item 32: Milwaukee M18™ 6.0Ah Battery

Quantity: 2

Specification	Description / Features
Brand and Model	Milwaukee 48-11-2460 M12 REDLITHIUM XC6.0 (or equivalent)
Voltage	12V
Capacity	≥ 6.0 Ah
Battery Type	Lithium-Ion (Li-Ion)
Protection	Overload, discharge and temperature protection
Cold Weather	Operates below 0°F / -18°C
Fuel Gauge	Onboard charge indicator
Compatibility	Compatible with all M12™ platform tools and chargers





## Minimum requirements

Item 01: Cordless Screwdriver

Quantity: 2

Specification	Description / Features
Torque (soft/hard/max.)	-/5/- Nm
No-load speed (1st gear / 2nd gear)	0 – 360 rpm
Battery voltage	3.6 V
Battery type	Lithium-Ion
Chuck capacity, min./max.	6.35 mm
Clutch torque	0.2 - 5 Nm
Max. screw diameter	5 mm
Sound power level	80 dB(A)
Sound pressure level	70 B(A)



Item 02: Battery Tester

Quantity: 1

Specification	Description / Features
Testing Range	C, AA, AAA, D, N, 9V (6F22), and 1.55V button battery
Working Temperature	0°C ~ 40°C
Portable	Yes
Can Test	C, AA, AAA, D, N, 9V 6F22, and 1.5V button cell batteries



34 من 39 : صفحه

**Item 03: Micro Cleaning Tools Computer Vacuum/Blower Duster**

Quantity: 1

Specification	Description / Features
Construction	All Steel
Speed	Single Speed
Motor	.75 Peak HP Single Fan Motor 220V
Amps	4.0
Watts	480
CFM	51
Cord	12 Ft. 2 Conductor
Unit Size	4" x 5.5" x 16"
Unit Weight	1.3 Kgs
ESD Safe	No
Accessories	20" Flexible Hose, Crevice Tool, Air "Pin Pointer", Dust Brush, Shoulder Strap, Five Extra Disposable Bags, plus 4 Pc. Micro Cleaning Tool Kit.



**Item 04: CCTV Tester**

**Quantity:** 1

**Warranty:** Minimum 06 months

Specification	Description / Features
<b>CPU/RAM/ROM</b>	4-core 2.0GHz/2GB(LPDDR4)/16GB(EMMC)
<b>Operating System</b>	Android 11.0/+
<b>Display</b>	8-inch IPS touch screen, 2048*1536 resolution, Backlit buttons
<b>IP Camera Test</b> <b>Max 8K 32MP</b>	IP Discovery/ONVIF/IPC test /RTSP play /Client APK Rapid Video, Auto view the video, create testing report Hik test tool, pressing just one key to activate hikvision camera, Image test, can modify the username, password and IP parameters Dahua test tool, Dahua camera test, modify the username, password and IP parameters
<b>IP&amp; CVBS Test</b>	IP& CVBS test at the same time, converter test from analog to digital with dual test window
<b>Coaxial HD Test</b>	8MP TVI camera test, 3840 x 2160P 15FPS, UTC control/call OSD menu, Support coaxial audio 8MP CVI camera test, 3840 x 2160P 12.5F/15F,UTC control/call OSD menu 8MP AHD camera test, 3840 x 2160P 15FPS, UTC control/call OSD menu 8MP EX-SDI, HD-SDI, 3G-SDI camera test, UTC control & call OSD menu
<b>HDMI Input</b>	1 channel HDMI input, support 4K 3840x2160P 30fps
<b>HDMI Output</b>	1 channel HDMI output, support 4K 3840x2160P 60fps
<b>Zoom Image</b>	4x zoom, to enlarge image, screen snapshot, record, save, view and record and play back
<b>Power Supply</b>	DC12V/2A
<b>Wi-Fi</b>	Built in WIFI, 2.4GHz and 5GHz, speeds:433Mbps
<b>Network interface</b>	RJ45 Dual Gigabit Ethernet ports, 10/100/1000Mbps adaptive
<b>Network test</b>	Trace route, Link monitor, DHCP server, port flashing, Ping test
<b>Audio test</b>	1 channel audio signal input, test whether sound normal, 1 channel audio signal, to connect headphone
<b>Rechargeable</b>	After charging 3 to 4 hours, normal working time 15 hours
<b>Auto off</b>	1 to 30(mins)
<b>Dimension/Weight</b>	Tester: 260x183x43mm(10.23x7.2x1.69inch) / 1200g(2.65lbs) Package: 350x300x100mm(13.78x11.81x3.94) / 2740g(6.04lbs)



**Item 05: RJ45 Crimping Tool**

Quantity: 2

Specification	Description / Features
Pass Through Type	RJ45 Crimp Tool Pass Through CAT5 CAT5E CAT6 Crimper Cutter Stripper for RJ45 RJ12 RJ11 8P 6P End Pass Through connector



**Item 06: Shear Cutter**

Quantity: 2

Specification	Description / Features
Shear Cutter	Multi-Purpose shear cutter (with safety lock)



**Item 07: Wire Stripper**

Quantity: 4

Specification	Description / Features
Wire Stripper	Wire Stripper Tool



**Item 08: Networking Probe Kit**

**Quantity:** 2

**Warranty:** Minimum 03 months

Specification	Description / Features
Networking Probe Kit	Network toner and Probe kit Wire tracking RJ11 > 3000m; RJ45 > 100m, Low battery indication, 1050mAh rechargeable lithium battery.



**Item 09: Krone Impact Terminal Tool with Lock (Keystone Punch down)**

**Quantity:** 1

Specification	Description / Features
Krone Impact Terminal Tool with Lock (Keystone Punch down)	Krone Impact Terminal Tool with Lock (Keystone Punch down).



**Item 10: Multimeter****Quantity: 1**

Specification	Description / Features
Multimeter	continuity with beeper, diode test, data hold, auto power off, low battery indication, overload indication, backlight, transistor tester. 600V.

**Item 11: Heavy duty craft knife (Cutter Knife)****Quantity: 4**

Specification	Description / Features
Heavy duty craft knife	Heavy duty craft knife with extra blades

**Item 12: Tool bag****Quantity: 4**

Specification	Description / Features
Tool Bag	Too bag, Tear and worn resistant, Quality fabric, multiple pockets with various dimensions, easy to carry

**Item 13: Soldering wire****Quantity: 4**

Specification	Description / Features
Soldering Wire	Flux cored solder wire

**Item 14: Combination plier****Quantity: 1**

Specification	Description / Features
Combination Plier	Combination plier

**Item 15: Long nose plier****Quantity: 4**

Specification	Description / Features
Long nose plier	<b>Pliers Head Shape</b> Serrated

**Item 16: Wireless mini screwdriver set****Quantity: 1**

Specification	Description / Features
Mini Electric Screwdriver Set	Small Electric Precision Screwdriver with 5 Torque Levels, Max 0.75N.m, 500mAh Battery, 50-in-1 Cordless Power Screwdriver Kit for Laptop, Phone & Electronics Repair

