

1 ބަންދު

2. ވަނަ ބައި 10 ވަނަ ބައި 10 ވަނަ ބައި 10 ވަނަ ބައި

2.1 ވަނަ ބައި 10 ވަނަ ބައި


GENERAL	
Quantity	2
Color	Preferred colours - Grey/White/Blue/Black To be selected after checking the options
Model Year	2026
ENGINE	
Bore × Stroke (mm)	47.000 x 63.121
Carburation	PGM-FI electronic fuel injection
Compression Ratio	10.0:1
Engine Displacement (cm ³)	109.51
Engine Type	eSP, 4-stroke, SOHC, Air cooled
Starter	Electric and Kick Start
WHEELS	
Brakes Front	Hydraulic disc brake
Brakes Rear	Drum
Suspension Front	Telescopic
Suspension Rear	Swing unit
Tyres Front	100/90-12 59J Tubeless
Tyres Rear	110/90-12 64J Tubeless
Wheels Front	Alloy wheel or Cast wheel



Wheels Rear	Alloy wheel or Cast wheel
DIMENSIONS AND WEIGHTS	
Caster Angle	26° 22'
Dimensions (L×W×H) (mm)	1,869 x 693 x 1,075
Frame type	Underbone: eSAF (Enhanced Smart Architecture Frame)
Fuel Tank Capacity (Litres)	4.2
Ground Clearance (mm)	149
Net Weight (kg)	94
Seat Height (mm)	750
Trail (mm)	84
Wheelbase (mm)	1251
TRANSMISSION	
Clutch	Automatic, centrifugal dry clutch
Final Drive	V-Belt
Transmission Type	V-Matic



GENERAL	
Quantity	2
Color	Preferred colours - Black/Blue To be selected after checking the options
Model Year	2026
ENGINE	
Bore × Stroke (mm)	53.500 x 55.502
Carburation	PGM-FI electronic fuel injection
Compression Ratio	11.5:1
Engine Displacement (cm ³)	124.77
Engine Type	eSP+, 4-stroke, single-cylinder, liquid-cooled
Starter	Electric
WHEELS	
Brakes Front	Hydraulic disc (CBS)
Brakes Rear	Drum
Suspension Front	Telescopic, hydraulic shock absorbers
Suspension Rear	Coil springs, hydraulic shock absorbers
Tyres Front	80/90-14M/C 40P - Tubeless
Tyres Rear	90/90-14M/C 52P - Tubeless
Wheels Front	Alloy wheel or Cast wheel
Wheels Rear	Alloy wheel or Cast wheel
DIMENSIONS AND WEIGHTS	

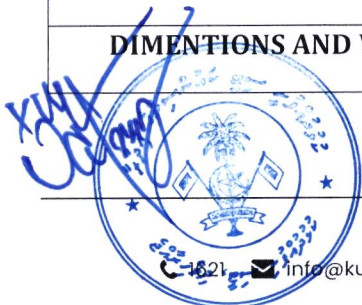

Caster Angle	26° 28'
Dimensions (L×W×H) (mm)	1,884 x 687 x 1,085
Frame type	Underbone
Fuel Tank Capacity (Litres)	4.4
Ground Clearance (mm)	141
Net Weight (kg)	111
Seat Height (mm)	775
Trail (mm)	84
Wheelbase (mm)	1,286
TRANSMISSION	
Clutch	Automatic, centrifugal, dry type
Final Drive	V-Belt
Transmission Type	V.Matic



GENERAL	
Quantity	1
Color	Preferred colour - White/Grey To be selected after checking the options
Model Year	2026
ENGINE	
Bore × Stroke (mm)	60.000 x 55.502
Carburation	PGM-FI electronic fuel injection
Compression Ratio	12.0:1
Engine Displacement (cm ³)	156.93
Engine Type	eSP+, 4-stroke, single-cylinder, liquid-cooled
Starter	Electric
WHEELS	
Brakes Front	Hydraulic disc (ABS)
Brakes Rear	Drum
Suspension Front	Telescopic, hydraulic shock absorbers
Suspension Rear	Coil springs, hydraulic shock absorbers
Tyres Front	90/80-14M/C 43P - Tubeless
Tyres Rear	100/80-14M/C 48P - Tubeless
Wheels Front	Alloy wheel or Cast wheel
Wheels Rear	Alloy wheel or Cast wheel



DIMENSIONS AND WEIGHTS	
Caster Angle	26° 30'
Dimensions (L×W×H) (mm)	1,887 x 686 x 1,086
Frame type	Underbone
Fuel Tank Capacity (Litres)	4.4
Ground Clearance (mm)	142
Net Weight (kg)	113
Seat Height (mm)	775
Trail (mm)	84
Wheelbase (mm)	1,286
TRANSMISSION	
Clutch	Automatic, centrifugal, dry type
Final Drive	V-Belt
Transmission Type	V.Matic



تعمیراتی منصوبوں کی فہرست

#	تعمیراتی منصوبہ	تعمیراتی سال	تعمیراتی رقم
1	سولہ سو گھر کی تعمیر 1		
2	سولہ سو گھر کی تعمیر 2		
3	سولہ سو گھر کی تعمیر 1		
4	تعمیراتی رقم		
		تعمیراتی رقم	
		تعمیراتی رقم 8%	
		تعمیراتی رقم (تعمیراتی رقم پر)	

