




Item 03: Wireless Mic System

Warranty: Minimum 6 Months

Quantity: 02



Specification	Description / Features
Wireless Receiver	Power Requirements: 12–15 V DC supplied by external power supply Output Impedance: XLR connector: 200 Ω 6.35 mm (1/4") connector: 50 Ω Audio Output Level: XLR connector: –27 dBV (into 100 kΩ load) 6.35 mm (1/4") connector: –13 dBV (into 100 kΩ load) RF Sensitivity: -105 dBm for 12 dB SINAD, typical Image Rejection: >50 dB, typical
Bodypack Transmitter	Audio Input Level: gain max -16 dBV maximum min (0 dB): +10 dBV maximum Gain Adjustment Range: 26 dB Input Impedance: 1MΩ RF Transmitter Output: 10 mW Power Requirements: 2 LR6 AA batteries
Handheld Transmitter	Audio Input Level: gain 0dB -20 dBV maximum -10dB: -10 dBV maximum Gain Adjustment Range: 10 dB RF Transmitter Output: 10 mW

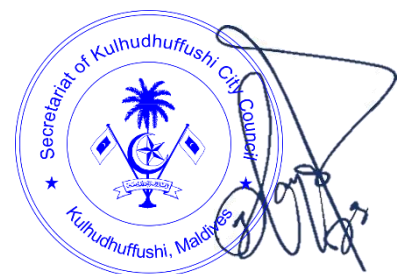

3 5 18 : 2020



Item 04: Portable Conference Camera (all in one)

Quantity: 02

Warranty: Minimum 06 months




Specification	Description / Features
Portable Conference Camera Pillar (all in one)	<p>Design: The device features a sleek, all-in-one design that is easy to use, manage, and portable, allowing for quick meeting setups.</p> <p>Video: It provides 1080p HD video imaging with a 120° wide-angle viewing without distortion, ensuring everyone in the room is visible.</p> <p>Audio: The All-in-One Pillar X12 includes an integrated speaker and four microphones to ensure clear audio pick-up and playback.</p> <p>Functionality: It supports smart features like auto-framing and speaker focusing to enhance the conferencing experience.</p> <p>Compatibility: The device is compatible with popular video conferencing software such as Zoom, Webex, Tencent Meeting, WeChat, and Ding Talk.</p> <p>Connectivity: The camera component connects via USB 2.0.</p>

Item 05: Mic Stand

Quantity: 01



Specification	Description / Features
Item Type	Boom Stand
Microphone Mount	No Mount Included
Mic Mount Thread Size	5/8"-27 Male
Boom Arm Type	Telescoping
Maximum Height	63" / 160 cm
Minimum Height	36.2" / 91.9 cm
Base Type	Tripod
Color	Black
Item Type	Boom Stand

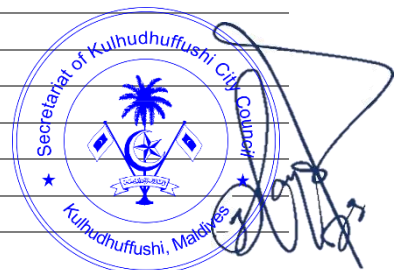



Item 06: Speaker Stand

Quantity: 02




Specification	Description / Features
Type	Speaker Stand
Material of Construction	Steel
Height Adjustment Range	31.2 to 60" / 79.2 to 152.4 cm
Mount Size	1.375" / 34.9 mm 1.5" / 38.1 mm
Load Capacity	60 lb / 274.2 kg
Weight	4.5 lb / 2 kg
Type	Speaker Stand
Material of Construction	Steel
Height Adjustment Range	31.2 to 60" / 79.2 to 152.4 cm

Item 07: Non-adhesive Laptop Stand

Quantity: 15



Specification	Description / Features
Height Adjustment	2" – 3"
Material	Vegan Leather, Fiberglass
Compatible Model	11.6" – 16"
Weight	3oz
Dimension	7in x 9.8in x 0.11in / 180mm x 250mm x 3mm

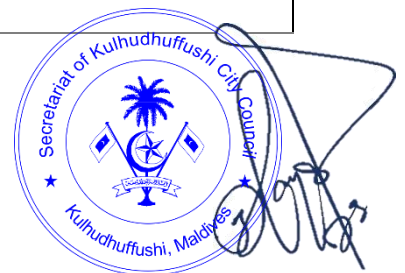



Item 08: Portable SSD (2TB) – NVME

Warranty: Minimum 06 months

Quantity: 4

Specification	Description / Features
Portable SSD (2TB) – NVME	2TB, USB 3.2 Gen 2 (10Gb/s) via USB-C connection Up to 1,050 MB/s Up to 1,050 MB/s (for X9 Pro version; standard X9 has read speed specified) 65+-5 x 50+-5 x 10+-5 mm Approximately 32g (for 1TB model) Shock and vibration resistant; drop proof up to 7.5 feet (2 meters) IP55 water and dust resistance (protection against dust and water jets) Windows, Mac, iPad Pro, Chromebook, Android, Linux, PS4, PS5, and Xbox

Item 09: 2.0 Usb Pendrive 16GB

Quantity: 4

Specification	Description / Features
2.0 USB Pendrive 16GB	A USB 2.0 pen drive, officially known as Hi-Speed USB , offers a theoretical maximum signaling rate of 480 megabits per second (Mbps) , a significant improvement over its predecessor. In practice, however, typical real-world transfer speeds usually max out around 30-40 megabytes per second (MB/s).


Item 10: Portable Touch monitor

Warranty: Minimum 12 Months

Quantity: 4



Specification	Description / Features
Display Size	15.6"
Active Display Area(mm)	344x194
Panel type	In-Plane Switching
Max. Resolution and Refresh Rate	USB-C: 1920x1080@144Hz
Mini HDMI: 1920@1080@144Hz	
Response Time	8ms (G to G)
Contrast Ratio	1200:1 (Native)
Brightness	250 cd/m2
Viewing Angle	170°(H), 170°(V)
Colors	16.7M
Color gamut	45% NTSC
Bits	6Bit+FRC
Input Signal	2 x USB-C
1 x Mini HDMI	

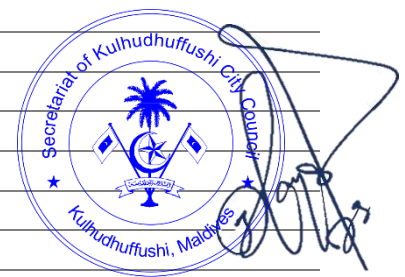



1 x Micro-USB	
Speaker + Audio out	
VESA Wall Mounting	N/A
Speaker	1W x 2
Power Supply (100 - 240 V)	External Adapter
Tilt	0° – 80°
Swivel	N/A
Pivot	N/A

Item 11: Portable Monitor Stand

Quantity: 10




Specification	Description / Features
Ultra-Lightweight:	225g+-10
Adjustable Height:	Extends up to 39cm for an ergonomic screen height.
Compact & Travel-Friendly:	Folds down to just 22cm for seamless storage in your bag.
Weight limit:	Holds portable monitors up to 900g (2 lbs)

Item 12: Camera Side bag 3L

Quantity: 02



Specification	Description / Features
Camera Side bag 3L	Black Sling Strap, Handle Zipper Adjustable Dividers (Hook & Loop) Water Resistant (Material) Exterior 12.01+-2 x 7.68+-2 x 4.33+-2 inch Interior 7.8+-2 x 3.5+-2 x 2.52+-2 inch Weight 0.45+-2 kg (Empty)

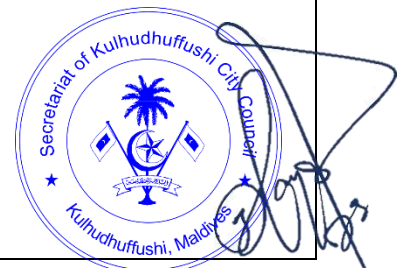




Item 13: Windows Tablet 13" with Flex Keyboard

Quantity: 2

Warranty: Minimum 12 months




Specification	Description / Features
Processor	Snapdragon X Plus (10 Core), with LCD display
NPU	Qualcomm Hexagon with 45 TOPS
Graphics	Qualcomm Adreno GPU
Memory and storage	16GB RAM Removable solid-state drive (Gen 4 SSD): 256GB
Display	Touchscreen: 13" PixelSense Flow display ²⁰ Resolution: 2880 x 1920 (267 PPI) Aspect ratio: 3:2 Contrast ratio: 1200:1 Dynamic refresh rate: up to 120Hz Color profile: sRGB and Vivid Individually color-calibrated display Adaptive color Adaptive contrast Auto color management Touch: 10-point multi-touch Dolby Vision IQ™ ²¹ Corning® Gorilla® Glass 5 Brightness: SDR: 600 nits maximum (typical) HDRvi: 600 nits peak luminance
Size and weight	Length: 11.3 inches (287 mm) Width: 8.2 inches (209 mm) Height: 0.37 inches
Security	Enhanced security with Microsoft Pluton TPM 2.0 Windows 11 Secured-core PC Windows Hello face authentication with Enhanced Sign-in security Microsoft Defender – for enhanced identity and privacy protection*
Cameras	Quad HD front-facing camera 1440p Quad HD camera with ultrawide field of view 10MP Ultra HD rear-facing camera Windows Hello face authentication camera
Audio	Dual Studio Mics with enhanced voice focus 2W stereo speakers with Dolby Atmos Support for Bluetooth LE Audio
Ports and charging	2 X USB-C® / USB4 ports with support for: Charging Data transfer DisplayPort 1.4a Thunderbolt 4 Dock and other accessories Supports fast charging

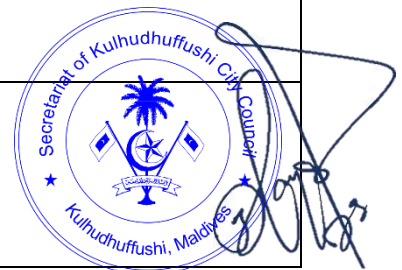



	Keyboard port
Network and connectivity	Wi-Fi 7 Bluetooth® Core 5.4 technology
Operating System	Windows 11
Exterior	Color: Sapphire / Black
Kickstand	Kickstand with 165 degrees full friction hinge
Sensors	Ambient color sensor Accelerometer Gyroscope Magnetometer
Color	Ocean
Flex Keyboard	<p>Size and Weight Length: 11.38 – 13 inch Width: 8.71 - 10 inch Height: 0.21 - 1 inch Weight: 0.75 - 2 lbs</p> <p>Battery</p> <ul style="list-style-type: none"> - Up to 41 hours of continuous typing while detached^{Footnote2} - Rechargeable Lithium-ion polymer battery <p>Keys</p> <ul style="list-style-type: none"> - Activation: Moving (mechanical) keys - Layout: English, full row of function keys (F1 - F12) - Dedicated keys for Copilot^{Footnote5}, microphone mute, snipping, Windows shortcuts, media controls, screen brightness - Right click button - Optional bold keyset - Precision haptic touchpad - Backlight <p>Interface: Magnetic</p> <p>Sensors: Accelerometer</p> <p>Exterior Footnote : Material: Alcantara Colors: Match with tablet</p> <p>Battery capacities Minimum: 495mAh (Min. Energy: 1.862Wh) Typical: 513mAh (Typ. Energy: 1.929Wh)</p> <p>Connectivity: Bluetooth^{Footnote8}® Low Energy Connectivity Range: Up to 32.8 feet (10m) of connectivity in open air or up to 16.4 (5m) feet in a typical office environment^{Footnote8}</p>

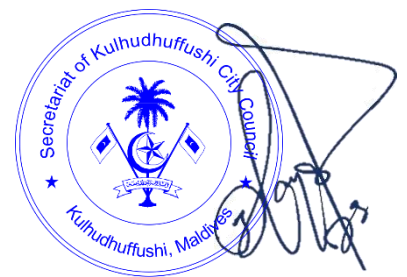




Item 14: Wireless Miracast Device

Quantity: 5

Warranty: Minimum 03 months



Specification	Description / Features
Operating system	Windows 10 and higher macOS 11 and higher Android v11 and higher iOS 14 and higher
System requirements	For smooth experience with Microsoft Teams or Zoom Minimum: Intel i3 dual-core processor or AMD Ryzen 7 / 8GB RAM / OS: Windows 10 latest build or Mac OS Mojave latest build Recommended: Intel i5 4-core processor or AMD Ryzen 9 / 8GB RAM / OS: Windows 11 latest build or Mac OS latest build
Video outputs	4K UHD (3840*2160) 30Hz. HDMI™ 1.4b or USB-C DisplayPort 1.2 (only Gen2)
Audio output	USB, HDMI
USB	1 X USB-A, 1 X USB-C
Buttons	2
App	Desktop & Mobile
Native protocols	Airplay, Google Cast, Miracast
Maximum sources simultaneously on screen	2
Noise Level	Max. 25dBA @ 0-30°C Max. 30dBA @ 30-40°C
Authentication protocol	WPA2-PSK in standalone mode WPA2-PSK or IEEE 802.1X using the Button in network integration mode
Wireless transmission protocol	IEEE 802.11 a/g/n/ac and IEEE 802.15.1
Reach	Max. 30m (100 ft) between Button and Base Unit Frequency band 2.4 GHZ and 5 GHz (DFS)
Frequency band	1x Ethernet LAN 1Gbit 1x USB-C 2.0 (front); 1x USB-A 2.0 (front) -only Gen2: 1x USB-C 3.0 (front); 1x USB-A 3.0 (front)
Connections	1x Ethernet LAN 1Gbit 1x USB-C 2.0 (front); 1x USB-A 2.0 (front) -only Gen2: 1x USB-C 3.0 (front); 1x USB-A 3.0 (front)
Temperature range	Operating: 0°C to +40°C (+32°F to +104°F) Max: 35°C (95°F) at 3000m Storage: -20°C to +60°C (-4°F to +140°F)
Humidity	Storage: 0 to 90% relative humidity, non-condensing Operation: 0 to 85% relative humidity, non-condensing
Anti-theft system	Kensington lock
Certifications	FCC/CE
Touch screen support & Interactivity	Yes
Wireless conferencing	via App or Button
Local view	Yes
Network connection	LAN & WiFi

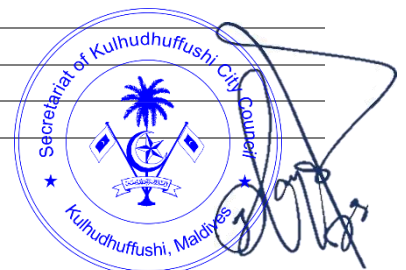



Item 15: Camera Lens

Quantity: 02

Warranty: Minimum 06 months



Specification	Description / Features
Camera Lens	Focal Length 35 to 150mm
Model: Tamron 35-150mm f/2-2.8 Di III VXD	Aperture Maximum: f/2 to 2.8 Minimum: f/16 to 22
	Lens Mount Sony E
	Lens Format Coverage Full-Frame
	Angle of View 63° 26' to 16° 25'
	Minimum Focus Distance 13" / 33 cm
	Magnification 1:5.55 Macro Reproduction Ratio 0.18x Magnification
	Optical Design 21 Elements in 15 Groups
	Aperture/Iris Blades 9, Rounded
	Focus Type Autofocus
	Image Stabilization No
	Filter Size 82 mm (Front)
	Dimensions ø: 3.5 x L: 6.2" / ø: 89.2 x L: 158 mm
	Weight 2.6 lb / 1165 g


Item 16: Receiver and Transmitter

Quantity: 01

Warranty: Minimum 06 months



Specification	Description / Features
Receiver and Transmitter	Antenna I/O No
Model: DJI SDR Transmission Transmitter	Video I/O 1x HDMI Input 1x BNC (Unspecified SDI) Input
	Embedded Audio HDMI/SDI/USB/Wireless
	Audio I/O 1x 1/8" / 3.5 mm Headphone Output
	Power I/O 1x USB-C (9 VDC / 2 A) Input
	Other I/O 1x USB-C (Firmware) Input
	Wireless Range 1.9 Miles / 3 km (Line-of-Sight) 656.2' / 200 m (Without Quality Loss)
	Channel Bandwidth 20 MHz
	Frequency Range Non-DFS Frequencies 2.4 to 2.4835 GHz 5.725 to 5.85 GHz DFS
	Frequencies 5.47 to 5.725 GHz
	Latency 35 ms
	RF Power 30 dBm
	Wi-Fi Wi-Fi 6 (802.11ax); Tri-Band (2.4 & 5 + 5 GHz) with MU-MIMO Support (2 x 2)
	Bluetooth No
	Mobile App Compatible Yes: Android & iOS

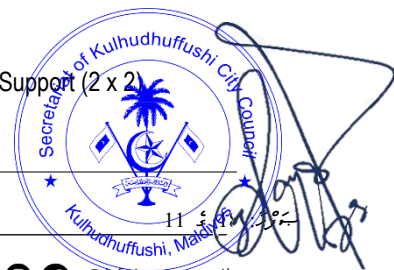



Cellular Support No
 Video Format HDMI/SDI/USB 1080p: 60/59.94/50/30/29.97/25/24/23.98 1080i: 60/59.94/50
 720p: 60/59.94/50
 Audio Format PCM Audio
 Wireless Video Compression Compressed
 Timecode Support No

Item 17: SSD Storage

Quantity: 04

Warranty: Minimum 06 months



Specification	Description / Features
Storage	Drive Type PCIe 4.0 / M.2 2280 SSD
Model: Crucial P310 x 4	Storage Capacity 4TB Read Speed Sequential: 7100 MB/s Random: 1,000,000 IOPS Write Speed Sequential: 6000 MB/s Random: 1,000,000 IOPS Encryption Support No Mean Time Between Failures (MTBF) 1.5 million Hours Endurance (Total Bytes Written) 800 TB Heatsink Included No


Item 18: PTZ Camera

Quantity: 02

Warranty: Minimum 1 Year Hardware Warranty



Specification	Description / Features
Image Sensor	1/2.8"-Type
Effective Sensor Resolution	2.07 Megapixel (1920 x 1080)
Max Optical Zoom	30x
Max Video Output	via RJ45 / USB / HDMI Up to 1080p at 25/30.00/50/60.00 fps
Max Recording Modes	No
Broadcast Output	NTSC/PAL
IP Streaming	NDI HX2/NDI HX3/RTMP/RTSP 1920 x 1080 at 60p
Wireless	Wi-Fi 5 (802.11ac) *Built-In
PoE Support	Yes: PoE 802.3af
Mounting	1x 1/4"-20 Female

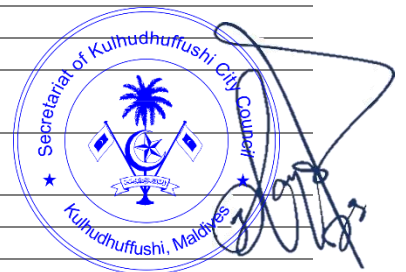



Item 19: Tripod

Quantity: 02


Warranty: Minimum 1 Year Hardware Warranty




Specification	Description / Features
Camera Mounting	1/4"-20 Screw (Quick Release Plate: Arca-Type)
Head Type	Ball Head
Drag Control	No
Primary Material	Carbon Fiber
Load Capacity	17.6 lb / 8 kg
Maximum Working Height	55.5" / 141 cm
Minimum Working Height	17.7" / 45 cm
Closed Length	15.7" / 40 cm
Weight	2.36 lb / 1.07 kg

Item 20: AI-Enabled PTZ Camera with Integrated Microphone (for medium meeting room)

Quantity: 2

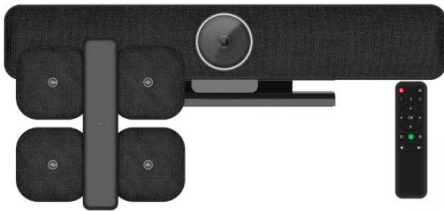

Specification	Description / Features
Brand	Infinity, Logitech, Cisco, Huawei or an equivalent brand
Speaker	Built-In Hi-Fi Speaker
Microphone Array	Built-In 4 Microphone Array
Extension Microphone	4x Wireless Extension Microphone
Pickup Distance	Voice Pickup Range Up to 8 Meters
Cable Length:	1.5M
Actual Maximum Output	2W
Cycle Number Range:	20Hz - 20kHz
Resistance Value:	4 Ohms
Signal to Loss Ratio:	70dB
Battery Capacity:	Built-In 3000mAh Battery
Supported Systems:	Windows 10/8/7, macOS 10.10 or above / Chrome OSTM / Android TM v5.0 or above
Warranty:	12 Months
Package Contents	1 x Video Bar 1 x Camera Remote Control 1 x Adapter 1 x USB Cable (5 Meters) 4 x Wireless Microphone 1 x Charging pile 1 x Quick Installation Guide

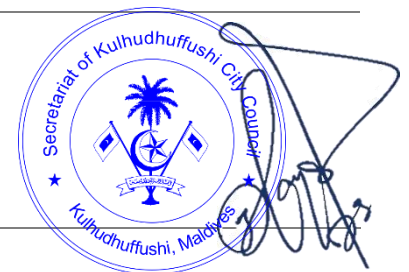



Item 21: Laptop

Quantity: 11

Warranty: Minimum 1 Year Hardware Warranty

Specification	Description / Features
Brand	Dell, HP, ACER or an equivalent brand
Released year	2025 and after
Screen size	15.6" – 16"
Processor	Intel® Core™ Ultra 7 (series 2) or Intel® Core™ i7, 14th Gen
Operating System	Windows 11 Pro, English, Genuine 1 year
Graphics	Integrated Graphics
RAM	16GB, DDR5, 3200MHz
Hard drive	512 GB, M.2, PCIe NVMe, SSD
Keyboard	Backlit Keyboard with Numeric Keyboard, English US
Ports	2 x USB-A ports 1 x USB-C 1 x Headset jack 1 x HDMI 1.4 port
Accessories	1 x Charger


Item 22: Mouse

Quantity: 10

Warranty: Minimum 1 Year Hardware Warranty



Specification	Description / Features
Sensor Technology	High Precision Optical Tracking
DPI (Min/Max):	1000±
Number of Buttons:	8
Scroll Wheel	Yes, Rubber
Tilt Wheel	Yes, with middle click
Connection Type:	2.4 GHz wireless connection and Bluetooth Low Energy Technology

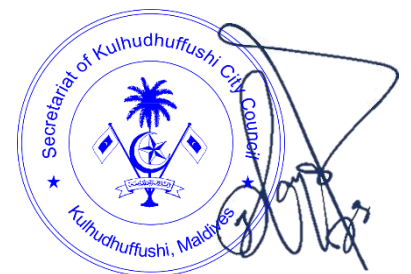

14 5 18 : 2025




Item 23: Drone

Quantity: 1

Warranty: Minimum 1 Year Hardware Warranty



Specification	Description / Features
Takeoff Weight	2.3 lb / 1063 g
Dimensions (Folded)	4.9 x 4.2 x 10.1" / 124.8 x 106.6 x 257.6 mm
Rotor Configuration	Quadcopter
Remote ID	Yes
Internal Storage	512 GB SSD (High-Bitrate H.264 ALL-I support)
Memory Card Slot	microSD/microSDHC/microSDXC (Class 10/U3/V30 recommended)
Aircraft I/O	1x USB-C (Power)
Operating Temp	14 to 104°F / -10 to 40°C
Max Flight Time	51 Minutes
Max Hover Time	45 Minutes
Max Wind Resistance	26.8 mph / 43.1 km/h
Max Take-Off Altitude	3.7 Miles / 6 km
Max Tilt Angle	35°
Hovering Accuracy	Vertical: ±0.1 m (Vision) / ±0.5 m (GNSS); Horizontal: ±0.3 m (Vision) / ±0.5 m (GNSS)
GNSS Support	GPS, BeiDou, Galileo
Sensor	100 MP, 4/3"-Type CMOS
Lens	28mm-equivalent, f/2 (72° FoV)
Max Resolution	6016 x 3384 @ 60 fps / DCI 4K @ 120 fps
Still Support	100 MP (DNG / JPEG)
Zoom / Focus	2.5x Digital / Min Focus: 6.6' (2 m)
ISO / Shutter	Video: 100–12,800; Photo: 100–6400 / 1/16000 to 16s
Sensor	48 MP, 1/1.3"-Type CMOS
Lens	70mm-equivalent, f/2.8 (35° FoV)
Max Resolution	UHD 4K @ 120 fps
Still Support	48 MP (DNG / JPEG)
Zoom / Focus	6x Optical / Min Focus: 9.8' (3 m)
ISO / Shutter	Video: 100–12,800; Photo: 100–6400 / 1/16000 to 8s
Sensor	50 MP, 1/1.5"-Type CMOS
Lens	168mm-equivalent, f/2.8 (15° FoV)
Max Resolution	UHD 4K @ 100 fps
Still Support	50 MP (DNG / JPEG)
Zoom / Focus	24x Optical / Min Focus: 9.8' (3 m)
ISO / Shutter	Video: 100–12,800; Photo: 100–6400 / 1/16000 to 8s
Stabilization	3-Axis (Pitch, Roll, Yaw) + Vertical
Type	Omnidirectional with Infrared/LiDAR Enhancement

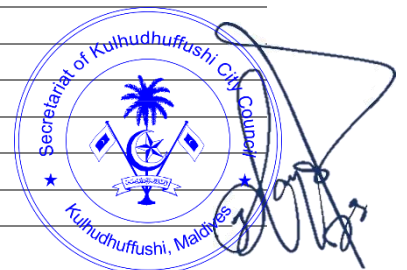



Item 24: Parallel Charging Hub for Drone Battery

Quantity: 1

Warranty: Minimum 1 Year Hardware Warranty



Specification	Description / Features
Number of Battery Bays	3
Charging Modes	Simultaneous
Power Source	AC Power (Cable Not Included)
Power I/O	1x USB-C Input • 5 to 20 VDC at 5 A
	1x USB-C Output • 10 to 17.2 VDC at 12 A (100 W)


Item 25: Drone Battery

Quantity: 3

Warranty: Minimum 1 Year Hardware Warranty



Specification	Description / Features
Battery Chemistry	Lithium Nickel Manganese Cobalt Oxide (LiNiMnCoO ₂)
Battery Capacity	6654 mAh / 95.3 Wh
Battery Configuration	4 S / 14.32 V
Current Output	Not Specified by Manufacturer
Maximum Flight Time	51 Minutes
Maximum Charging Power	17.2 V

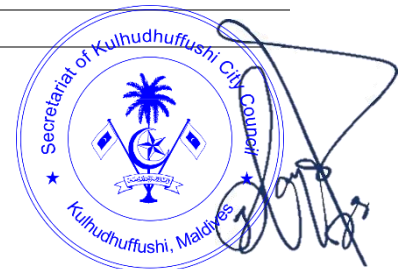




Item 26: Drone Remote

Quantity: 1

Warranty: Minimum 1 Year Hardware Warranty



Specification	Description / Features
Display	
Panel Type	LCD
Size	7.02"
Native Resolution	1920 x 1200
Touchscreen	Yes
Maximum Brightness	2000 nits / cd/m2
Touch Screen	10-Point Multi-Touch
Frame Rate	60 FPS
Inputs/Outputs	
Video I/O	1x HDMI Output (Video Only)
Media/Memory Card Slot	Single Slot: microSD/microSDHC/microSDXC (UHS-I) [64 GB Maximum / U3/V30 or Faster Recommended]
Internal Storage	128 GB
Wireless	
Wireless	5.8 GHz Radio/RF / 2.4 GHz Radio/RF / 5.1 GHz Radio/RF / Wi-Fi 6 (802.11ax) / Bluetooth 5.2
Mobile App Compatible	No
Global Positioning (GPS, GLONASS, etc.)	BeiDou, Galileo, GPS
Transmission	System: O4/O4+ Operating Frequency: 2.4000 to 2.4835 GHz, 5.170 to 5.250 GHz, and 5.725 to 5.850 GHz Antenna: Enterprise-Level Multibeam High-Gain, 2T4R Transmitter Power (EIRP) (2.4 GHz): <33 dBm (FCC), <20 dBm (CE, SRRRC, MIC) Transmitter Power (EIRP) (5.1 GHz): <23 dBm (CE) Transmitter Power (EIRP) (5.8 GHz): <33 dBm (FCC), <14 dBm (CE), <30 dBm (SRRRC) Bluetooth and Wifi support

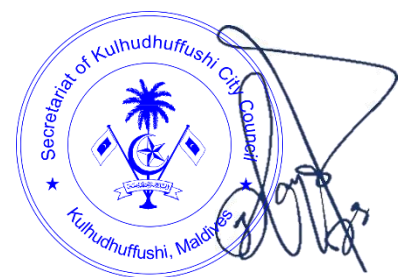



Item 27: L-mount battery

Quantity: 8

Warranty: Minimum 1 Year Hardware Warranty



Specification	Description / Features
Mount / Series Type	Sony L-Series
Chemistry	Lithium-Ion
Battery Capacity	4400 mAh
Output Voltage	7.4 VDC
Dimensions (W x H x D)	2.75 x 1.5 x 1.56" / 70 x 38 x 40 mm

Item 28: L-mount battery charging pack

Quantity: 1

Warranty: Minimum 1 Year Hardware Warranty



Specification	Description / Features
Compatibility	Sony L Series/NP-F
Number of Battery Bays	4
Charging Modes	Simultaneous
Power Source	USB Power (Cable Included) 1x USB-C Female Input • 20 VDC at 3.25 A 1x USB-A Female Output • 5 to 20 VDC at 1.6 A (65 W)
Power I/O	
Indicator	No
Features	Quick Charge
Dimensions	4.7 x 1.9 x 1.5" / 12 x 4.9 x 3.9 cm
Weight	4.9 oz / 139 g

